

# eMeet App Equipment Operation Manual

Howard & Donglian 2019-10-15

## Contents

1. Entrance & Prerequisite operation.....	2
1.1 Press [Connect device] .....	2
1.2 Settings / Bluetooth.....	3
2. Add device.....	5
2.1 Connect device.....	6
2.2.Set up WiFi.....	7
3. View Device details.....	10
4. Automatic Conversion and File Upload.....	12
5. Reset WiFi .....	14
6. Unbind.....	15
7. Device Upgrade .....	17
7.1 Press [ Device information ] .....	17
7.2 Press [ Device upgrade ].....	18
7.3 Press[ Upgrade ] .....	19
7.4 Waiting for upgrade.....	20
7.5 Upgrade completed .....	21
8. View Files.....	22
9. Delete file .....	23


# 1. Entrance & Prerequisite operation

## 1.1 Press [Connect device]




## 1.2 Settings / Bluetooth

Follow the prompts to make sure the Bluetooth on your phone is connected to eMeet Note N1

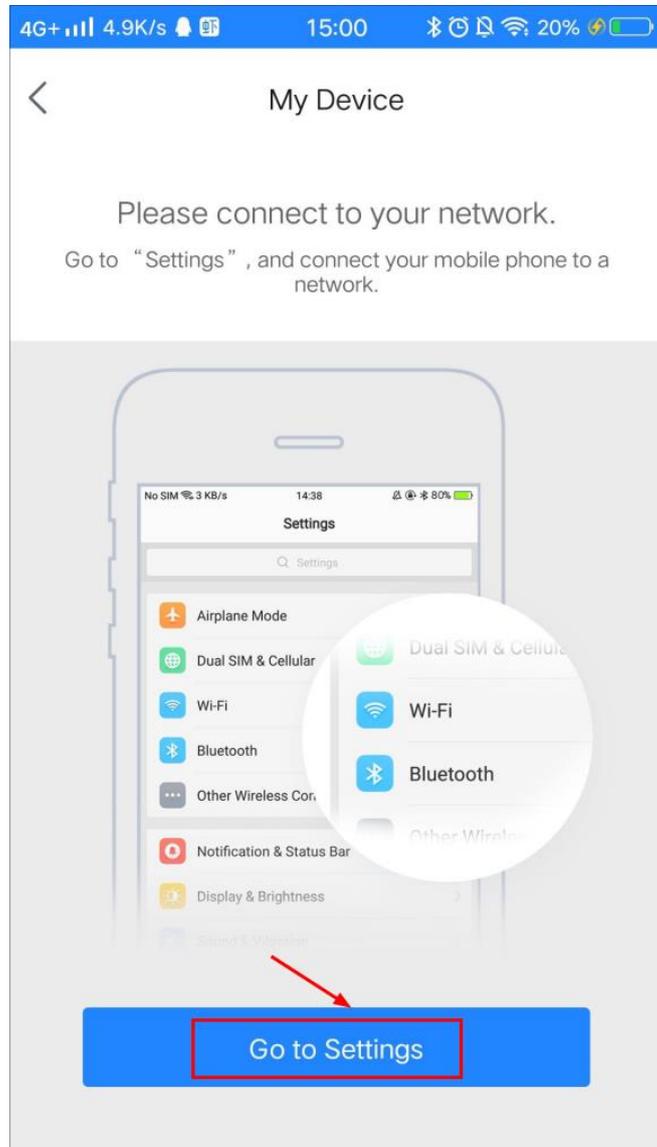


Enter [Settings] / [Bluetooth] in your phone, pair to eMeet Note N1。

Do not select [ eMeet Note N1 BLE ] if it is found. It is a BLE name.

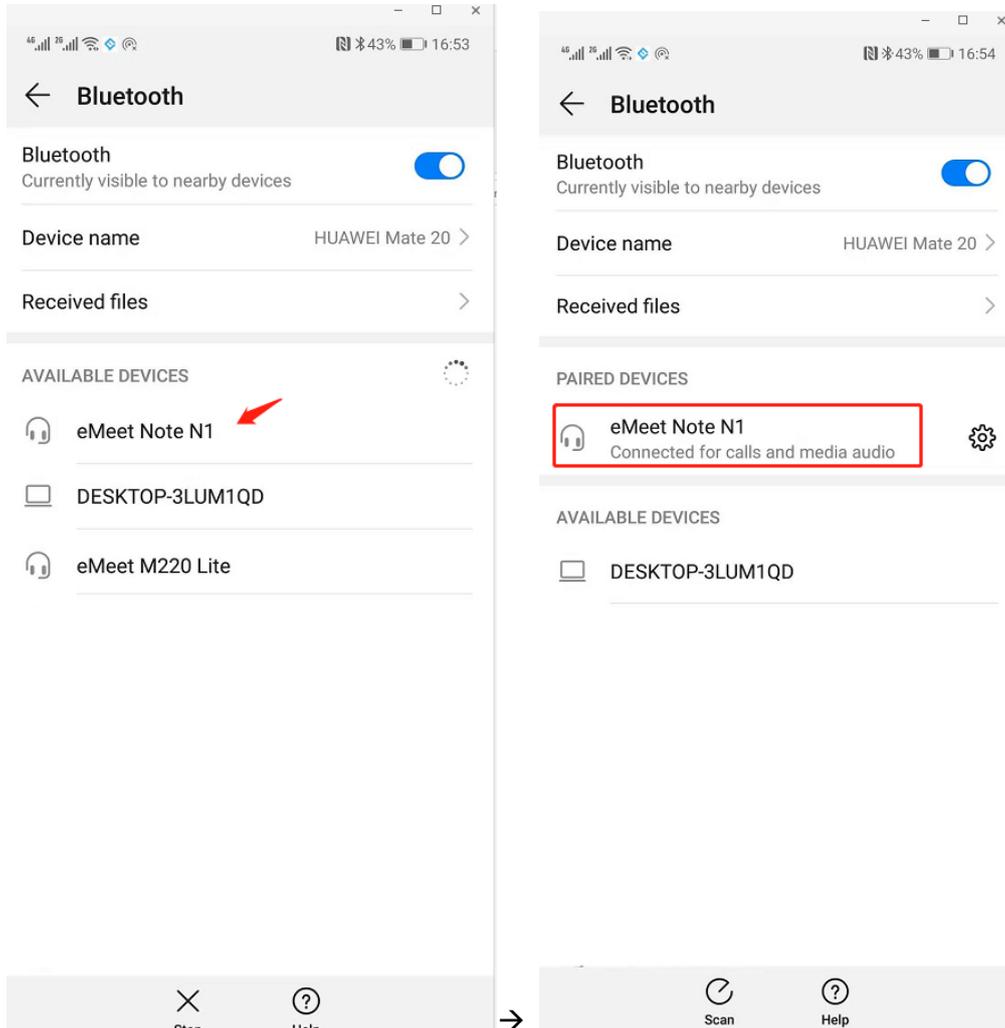


## 2. Add device

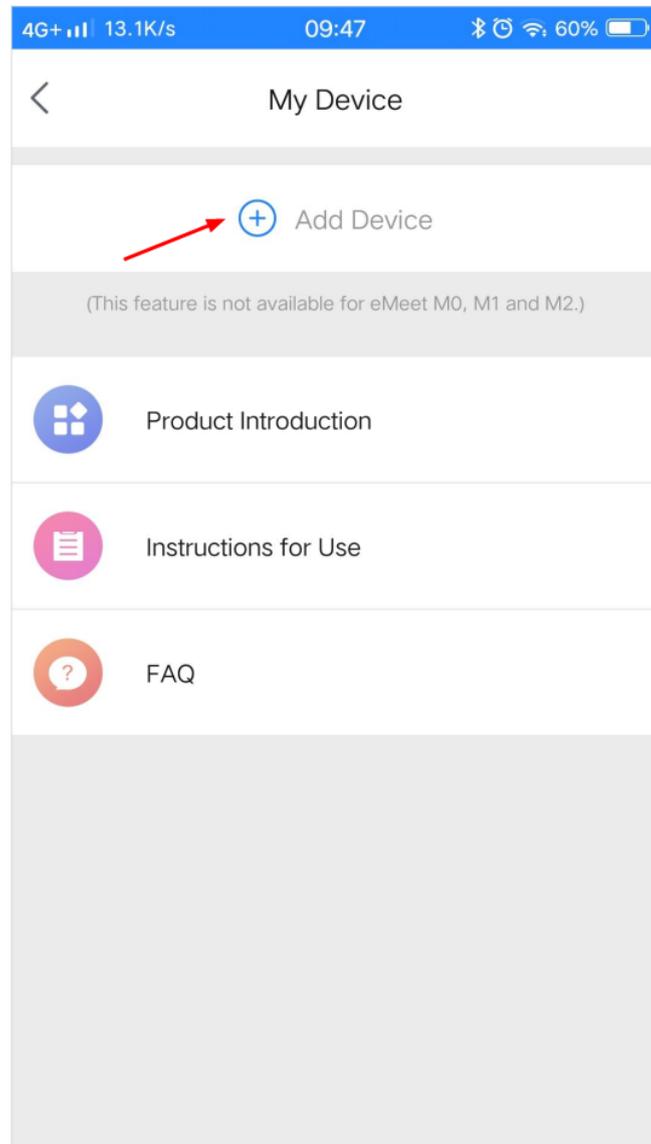

## 2.1 Connect device


After searching, click [Connect]

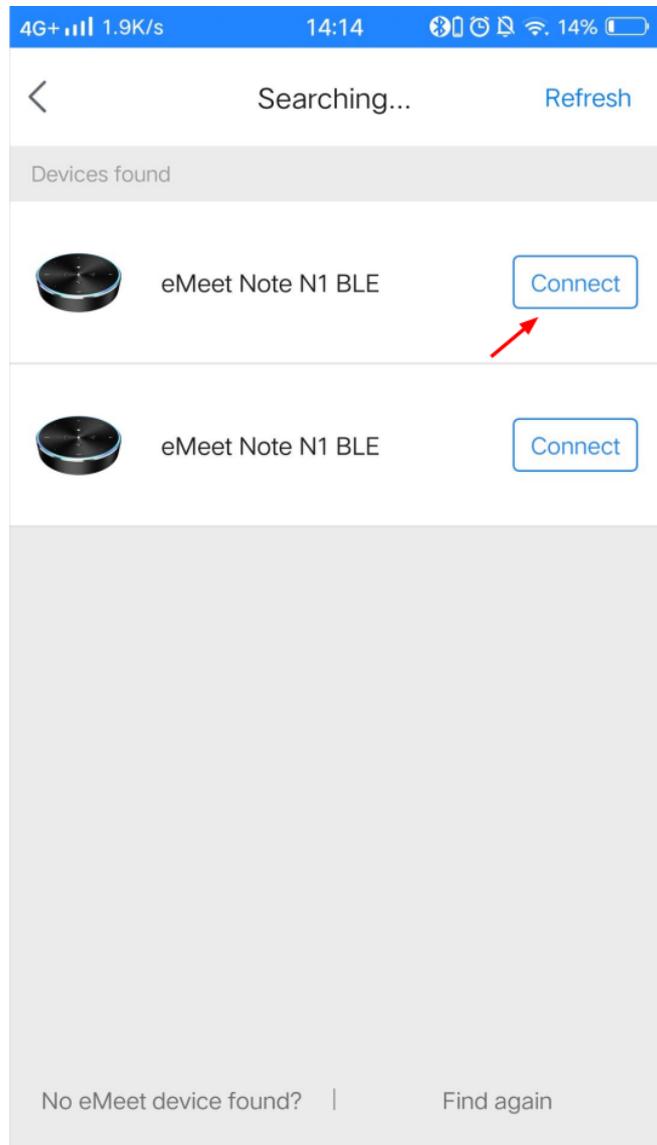


## 2.2.Set up WiFi

### 2.2.1 Input WiFi name and password

- 1) Set up WiFi to upgrade device and upload files . you can convert files to text after file is uploaded
- 2) If you do not want to upload file or you want to set up later, just press [Not Now].You can setup WiFi again in [Device Details], please read [Reset WiFi]

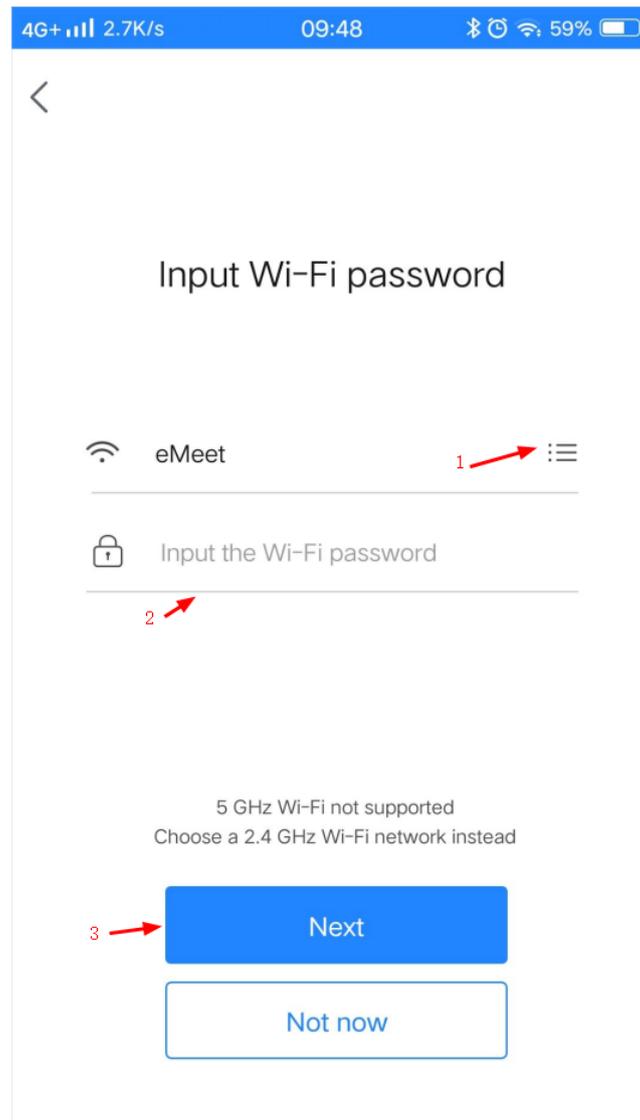

### 2.2.2 Checking WiFi SSID and password

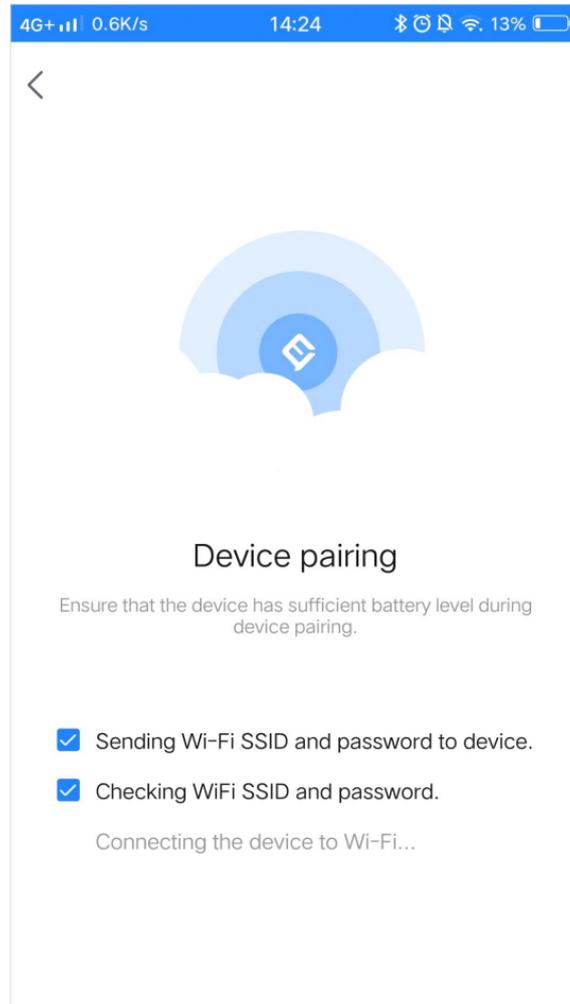


If WiFi is successfully connected , the power light will turn white



Device is connected and binded to your account

Press [Start using]



The device is connected




Start using

### 3. View Device details

Click [eMeet Note N1 BLE].

(The floating button will display your device name if your device is connected.)

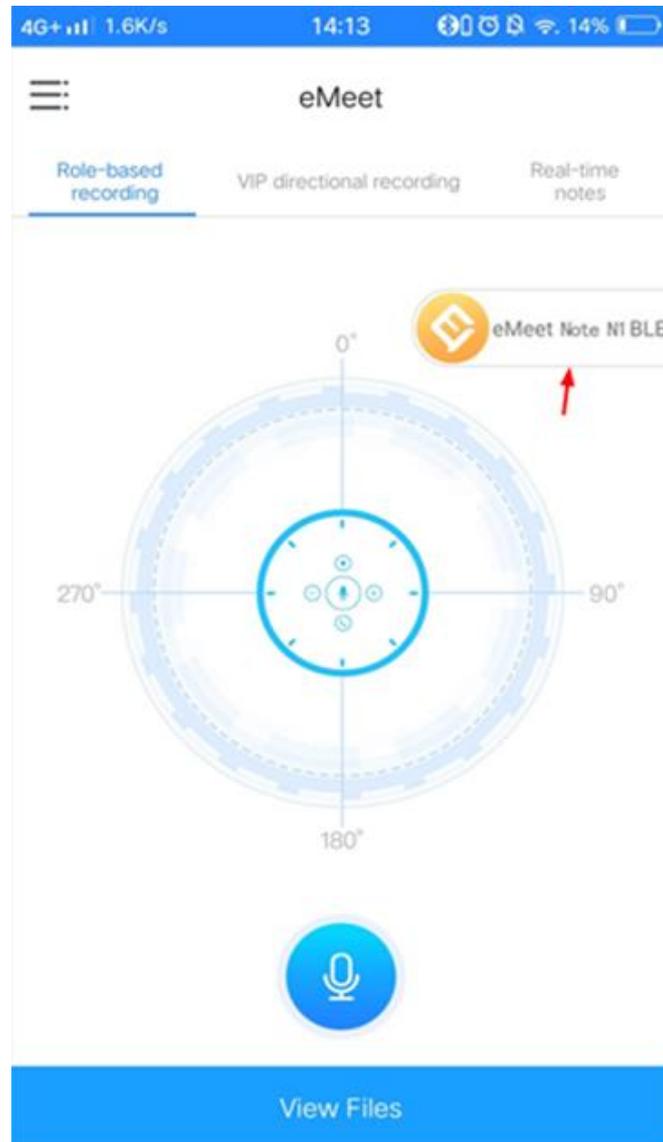

## Device details

4G+ 1K/s 14:19 14%


### Device details

- Device name: eMeet Note N1 BLE >
- Auto conversion [English (United States)]
- Automatic file upload
- Battery level
- Storage space: used104.23MB/29.09GB
- Device networking status: eMeet
- Reconnect network >
- Device information >


**UNBIND**

## 4. Automatic Conversion and File Upload

Please select the language before turning on [Auto conversion]

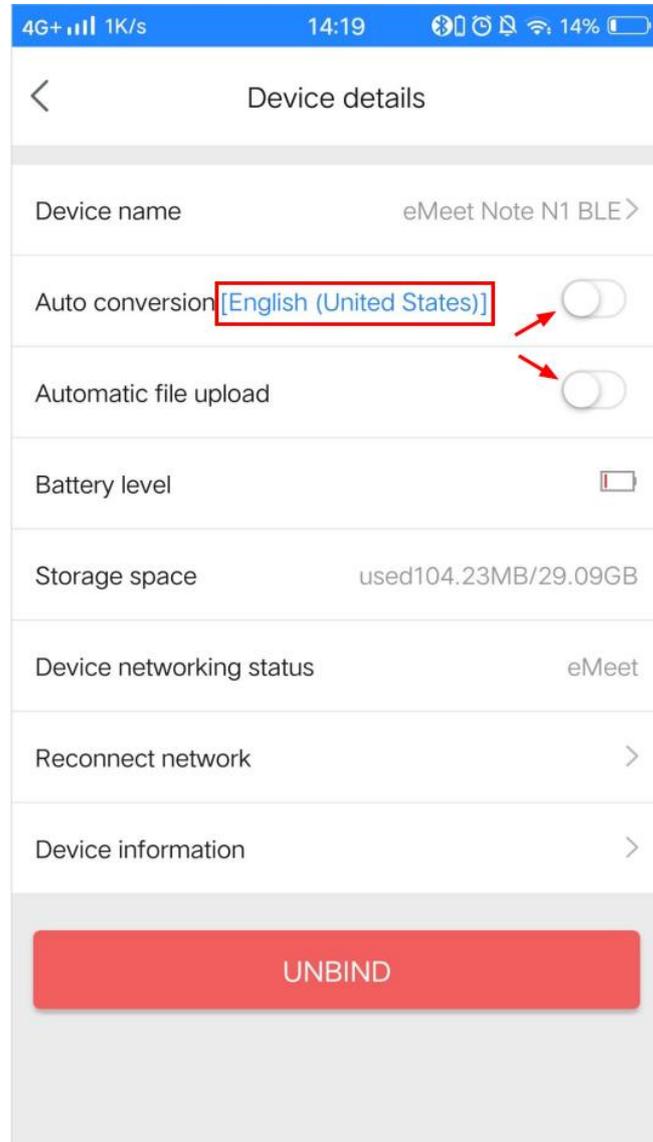


Turn on [Auto conversion] and [Automatic file upload]

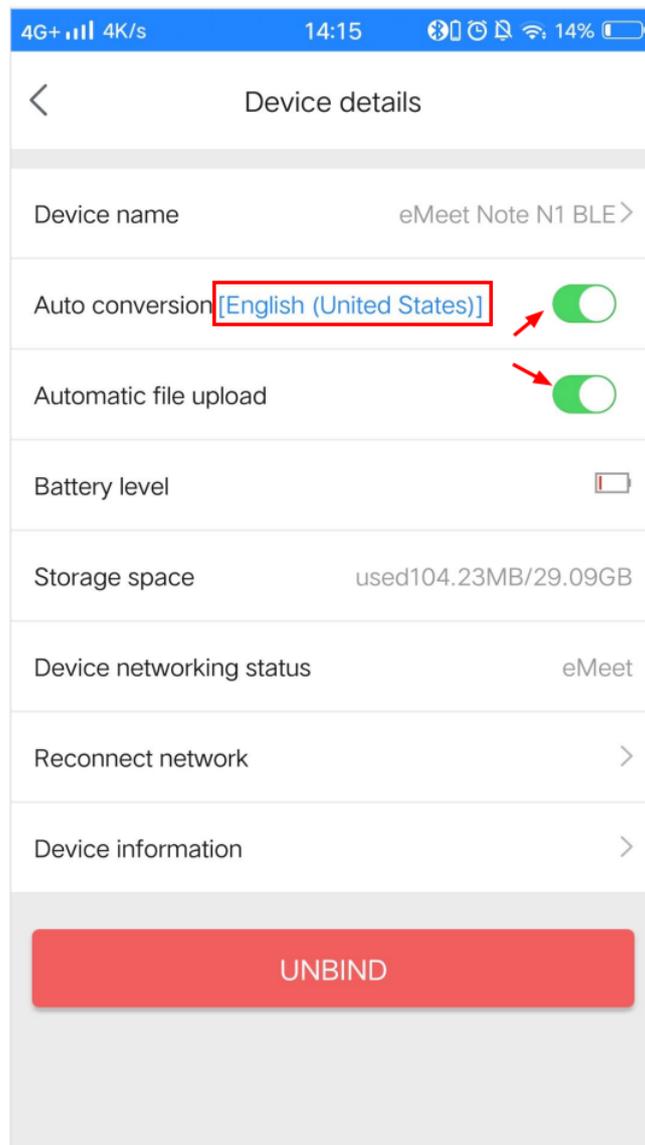


## 5.Reset WiFi

Press [Reconnect network] in [Device details]

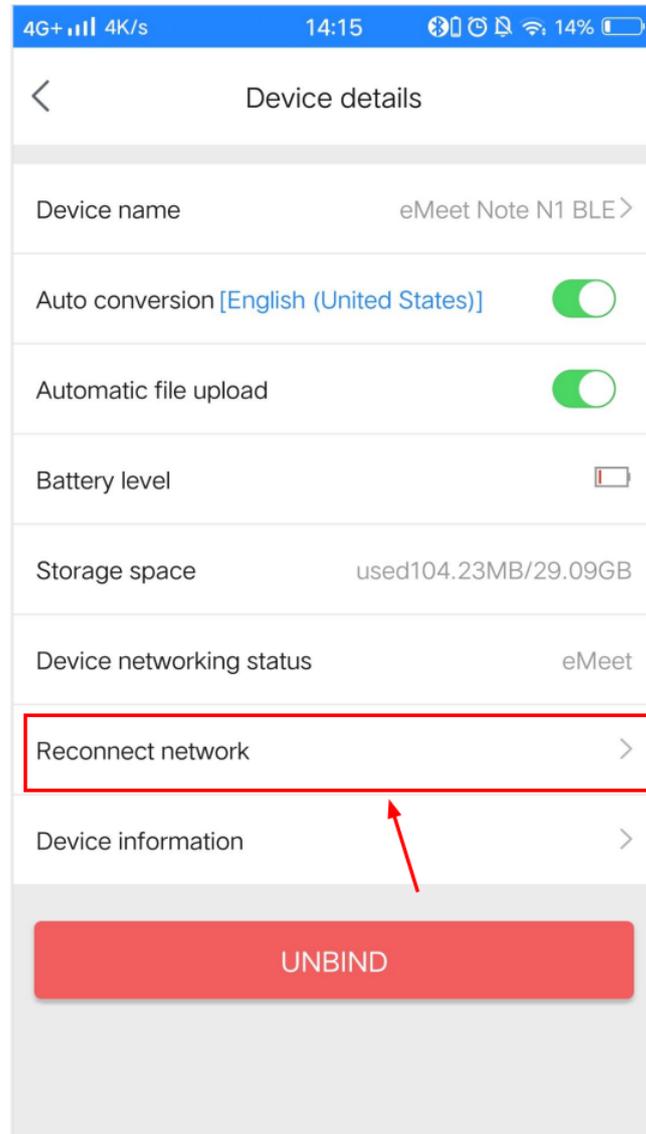


## 6.Unbind

Method 1: in the [My Device ] , swipe to right and press [Unbind ]

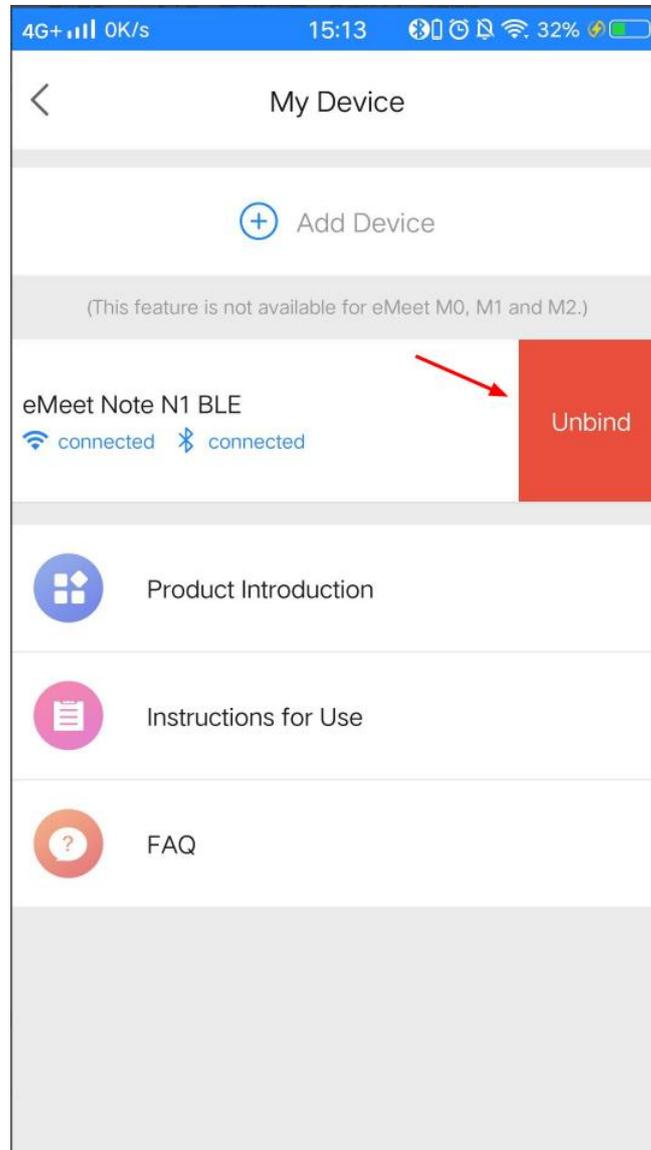


Method 2: Press [UNBIND] in [Device details]

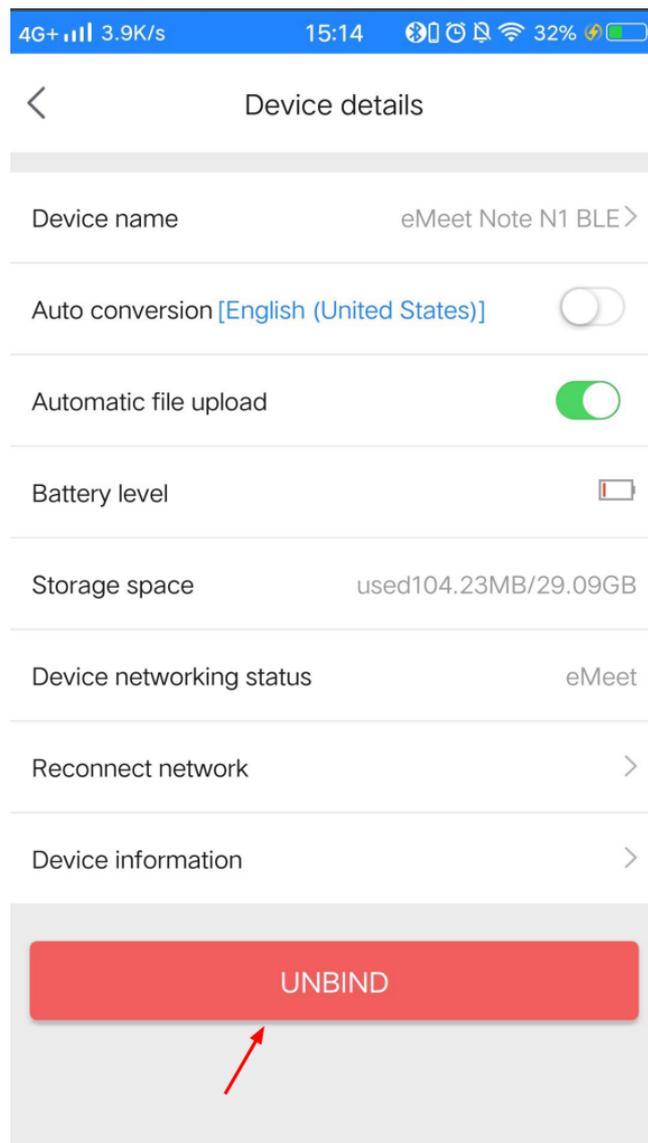


# 7.Device Upgrade

## 7.1 Press [ Device information ]

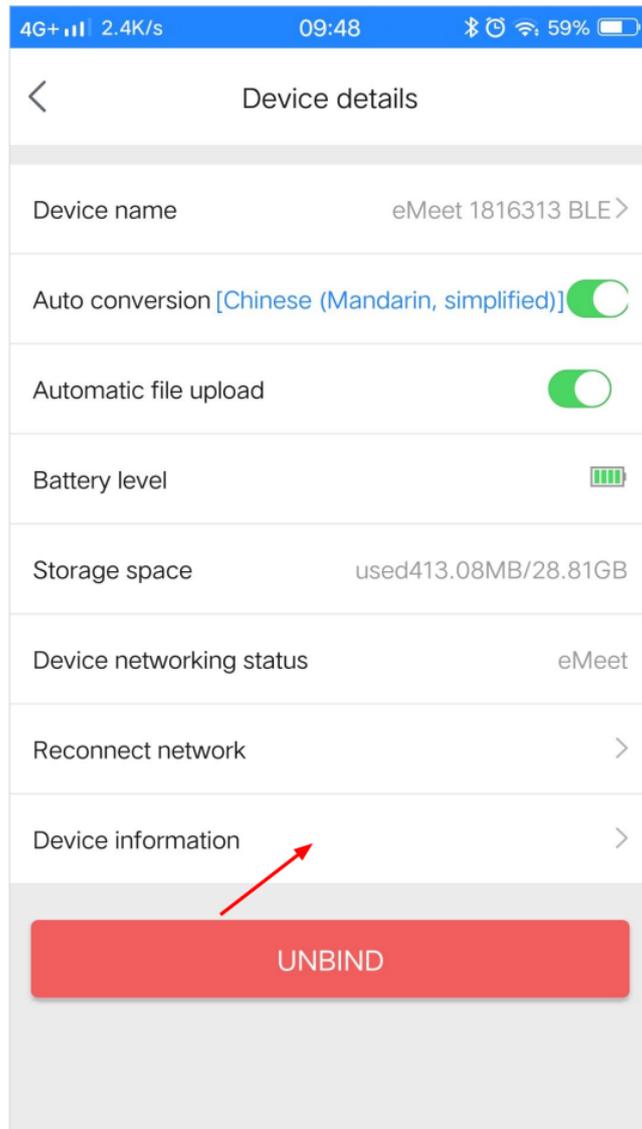


## 7.2 Press [ Device upgrade ]

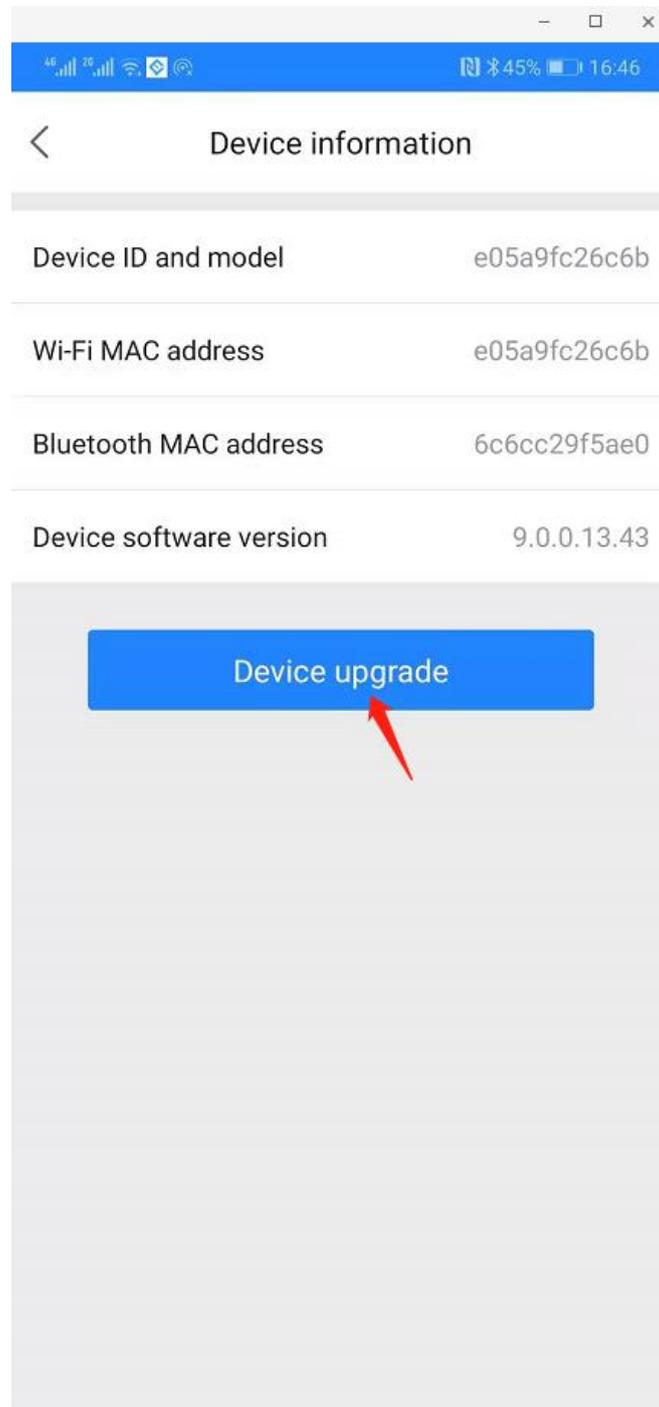

## 7.3 Press[ Upgrade ]


Please make sure the power is enough to upgrade

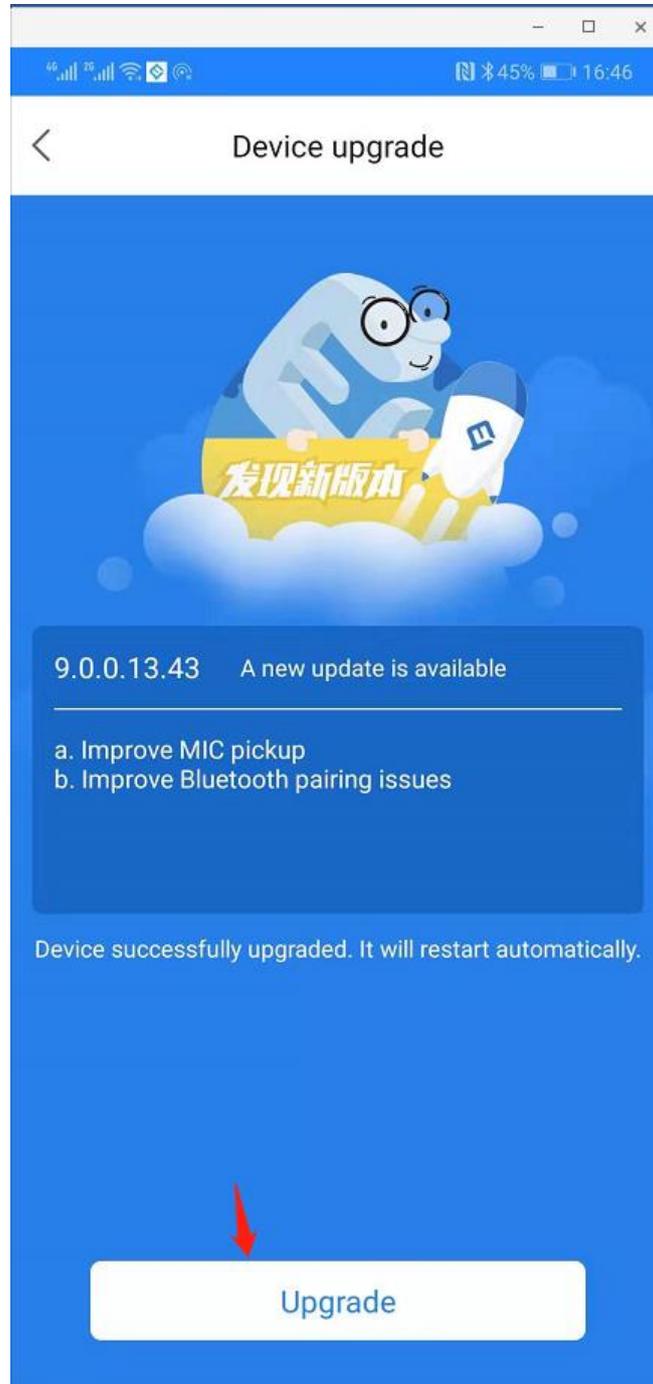

## 7.4 Waiting for upgrade

Please make sure the power is enough to upgrade. Wait for a few minutes.

After completion, the device will restart.

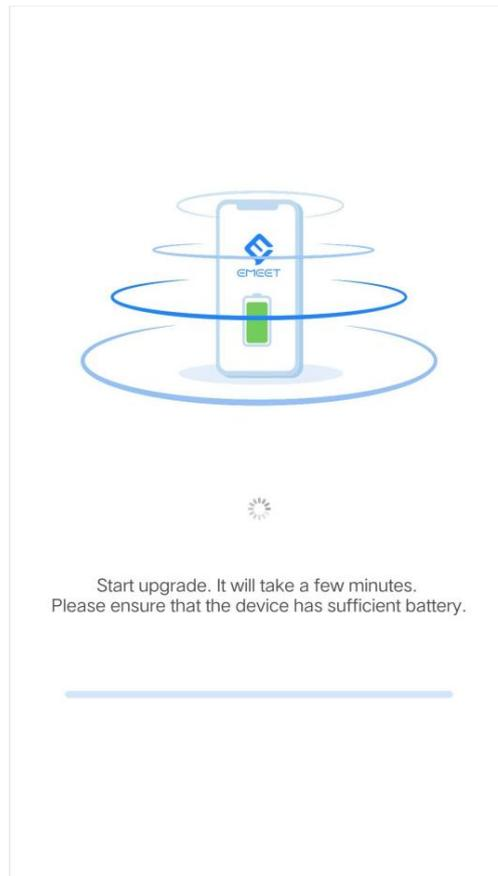


During the upgrade process, the LED of the device turns purple and the progress increases




## 7.5 Upgrade completed

Wait for the device to restart. You need to reconnect to device in [My Device].

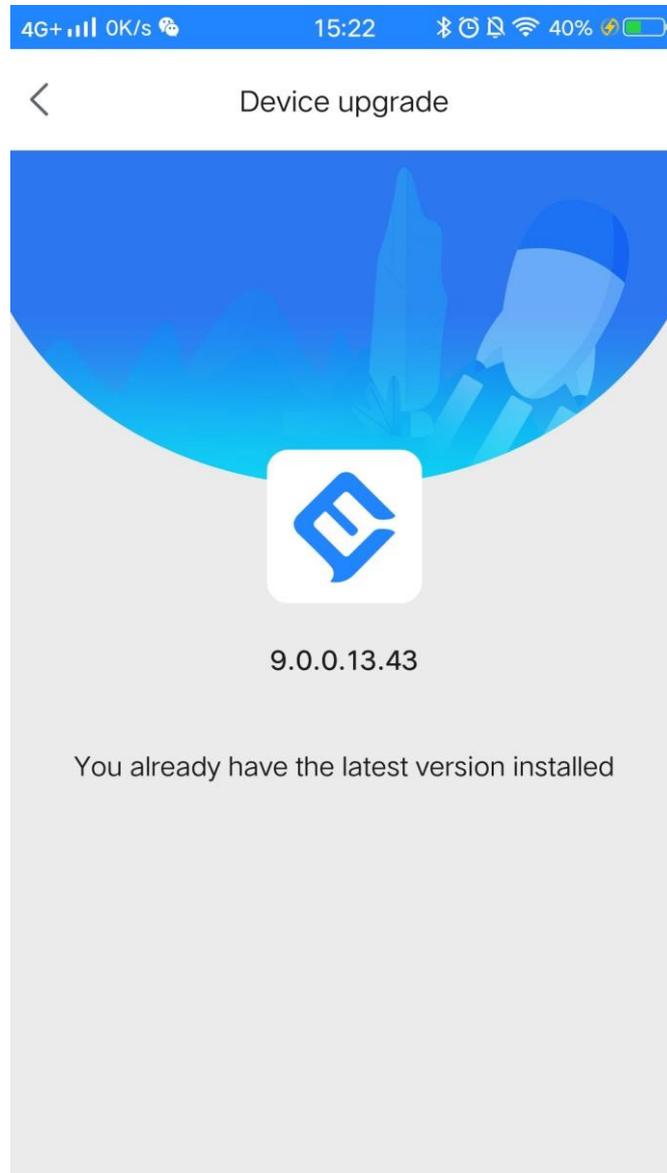

## 8.View Files

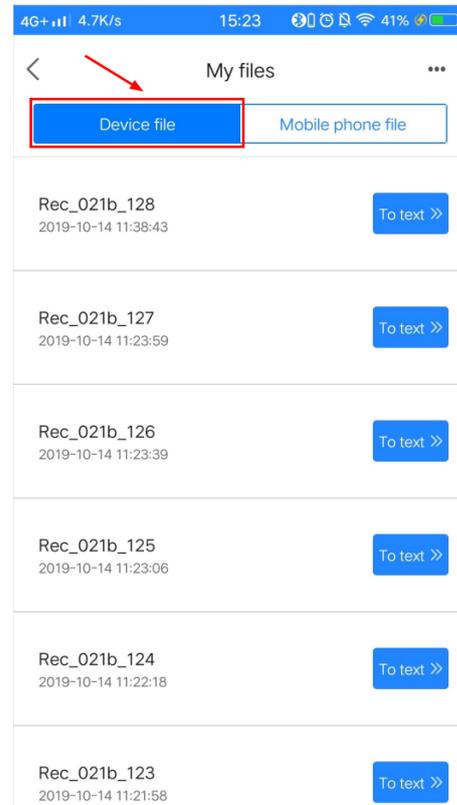

## 9. Delete file

iPhone (iOS): Swipe to the right, click [Delete]

Android: Long press, click [Delete]

